

Standard Color Light Box Color60-7

TILO®

Shenzhen Tilo Technology Co.,Ltd

www.tilo.net

- Color60-7 color light box will show the using time, light source name and switch times of each light source.
- Automatically switch and with the function of metamerism.
- Without preheating, no flicker.
- Low energy consumption and high luminous efficiency.
- Equipped with whole sets of British and American standard light sources.
- Contains A light source in American Standard
- The name of light sources is changeable.
- TILO is international famous brand.



PRODUCT FEATURES

- 1 Color60-7 color light box will show the using time, light source name and switch times of each light source.
- 2 Automatically switch and with the function of metamerism.
- 3 Without preheating, no flicker.
- 4 Low energy consumption and high luminous efficiency.
- 5 Equipped with whole sets of British and American standard light sources.
- 6 Contains A light source in American Standard.
- 7 The name of light sources is changeable.
- 8 TILO is international famous brand .

Color60 Seven-light sources light box adopts fully computer-controlled light-touch buttons to switch light sources at will, and can permanently record the name of each light source, the use time and the number of switching times. It has the function of testing the metamerism effect. It is implemented in accordance with international standards (ISO, ASTM, DIN, BSI, ANSI, CIE), and passes the national measurement inspection with an authoritative test report.

APPLICATION INDUSTRY


Color60 Seven sources standard light box is suitable for color management in textiles, toys, printing and dyeing, plastics, paints, inks, printing, pigments, chemicals, ceramics, footwear, leather, hardware, food, cosmetics and other industries, used to accurately check the color deviation of items.



PRODUCT PARAMETERS

| | | | |
|--------------------|---|-------------------|----------------|
| Project | parameters | | |
| Configuration | F, D65, TL84, UV, CWF/TL83, A in Total Seven Light Sources | | |
| Weight | 28Kg | | |
| Size(L*W*H) | 710x530x570 mm | | |
| Optional Accessory | 45 degree standard stand | | |
| Light source | | | |
| | Name | Color temperature | Power quantity |
| | D65 International standard Artificial Daylight | 6500K | 18W 4pcs |
| | TL84 Applied to stores in Europe, Japan and China | 4000K | 18W 2pcs |
| | CWF (Cool White Fluorescent) American Standard | 4150K | 18W 2pcs |
| | F "Sun-setting Light Yellow" incandescent light source(imitation of sunset) | 2700K | 40W 1pcs |
| | UV Viewing under ultraviolet light to detect and evaluate optical brighteners or fluorescent pigments | 365nm | 18W 2pcs |
| | A American shopwindow spotlight | 2856K | 60W 2pcs |
| | TL83 Warm White Fluorescent European Standard | 3000K | 18W 2pcs |

★ CONTACT US

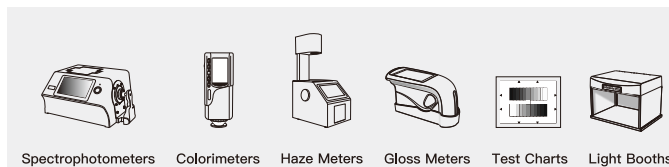


Shenzhen Tilo Technology Co., Ltd.
GUANGDONG THREINH TECHNOLOGY CO.,LTD.

web:www.tilo.net Email:tilo@tilo.cn

Tel:0086-020-82880288

Add: 6-8th floors, Building B33, Low Carbon Headquarters Park, Xincheng Road No.400, Zengcheng District, Guangzhou, Guangdong Province, China



As a production enterprise with business license
Shenzhen Tilo Technology Co.,Ltd was established in 1998

Shenzhen Tilo Technology Co., Ltd.